




SECTION
TRUNCATED DOME

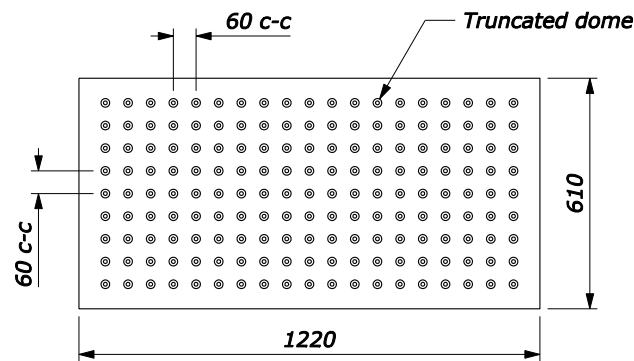


PLAN
DETECTABLE WARNING FIELD
WITH TRUNCATED DOMES

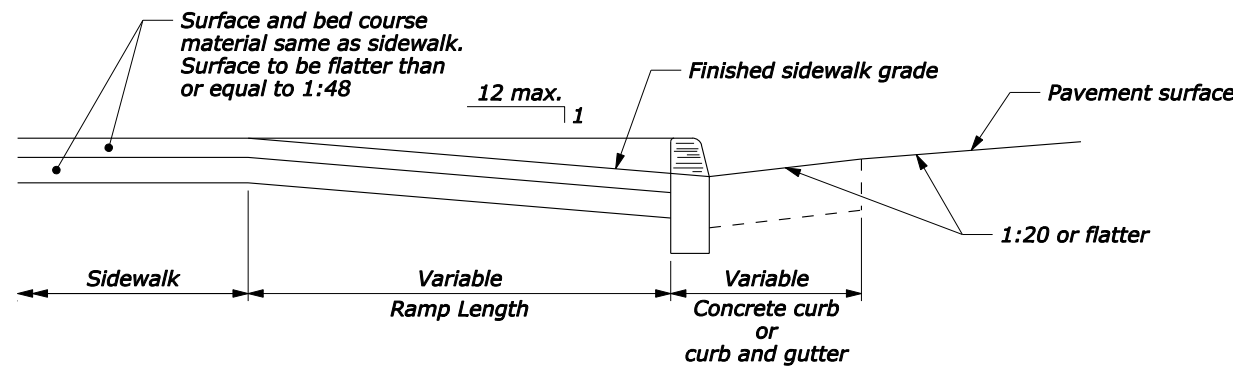


RAMP - TYPICAL SECTION

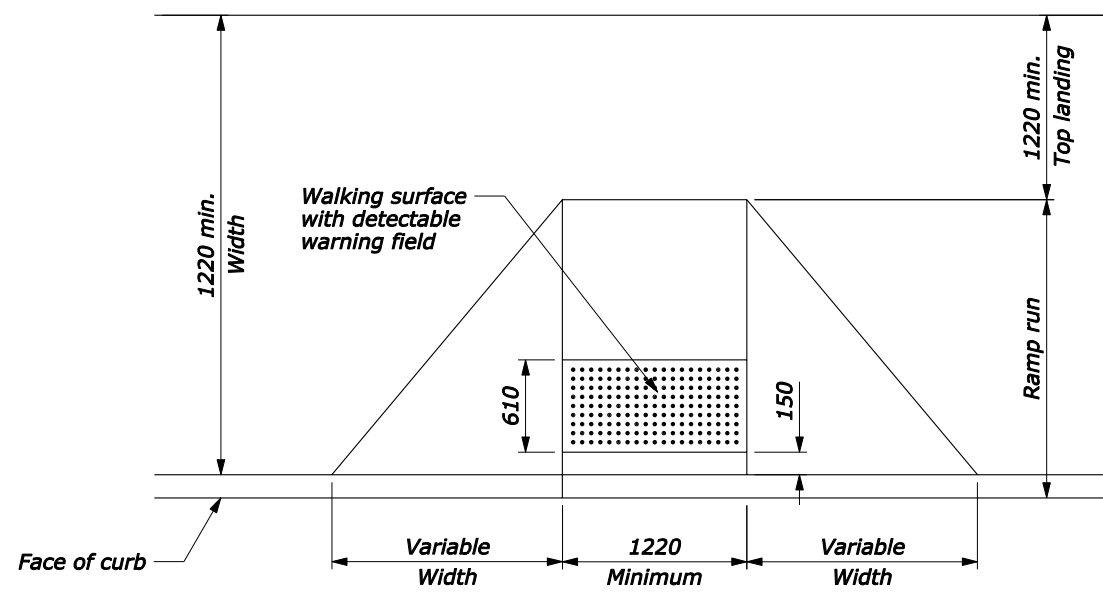

PERPENDICULAR CURB RAMP

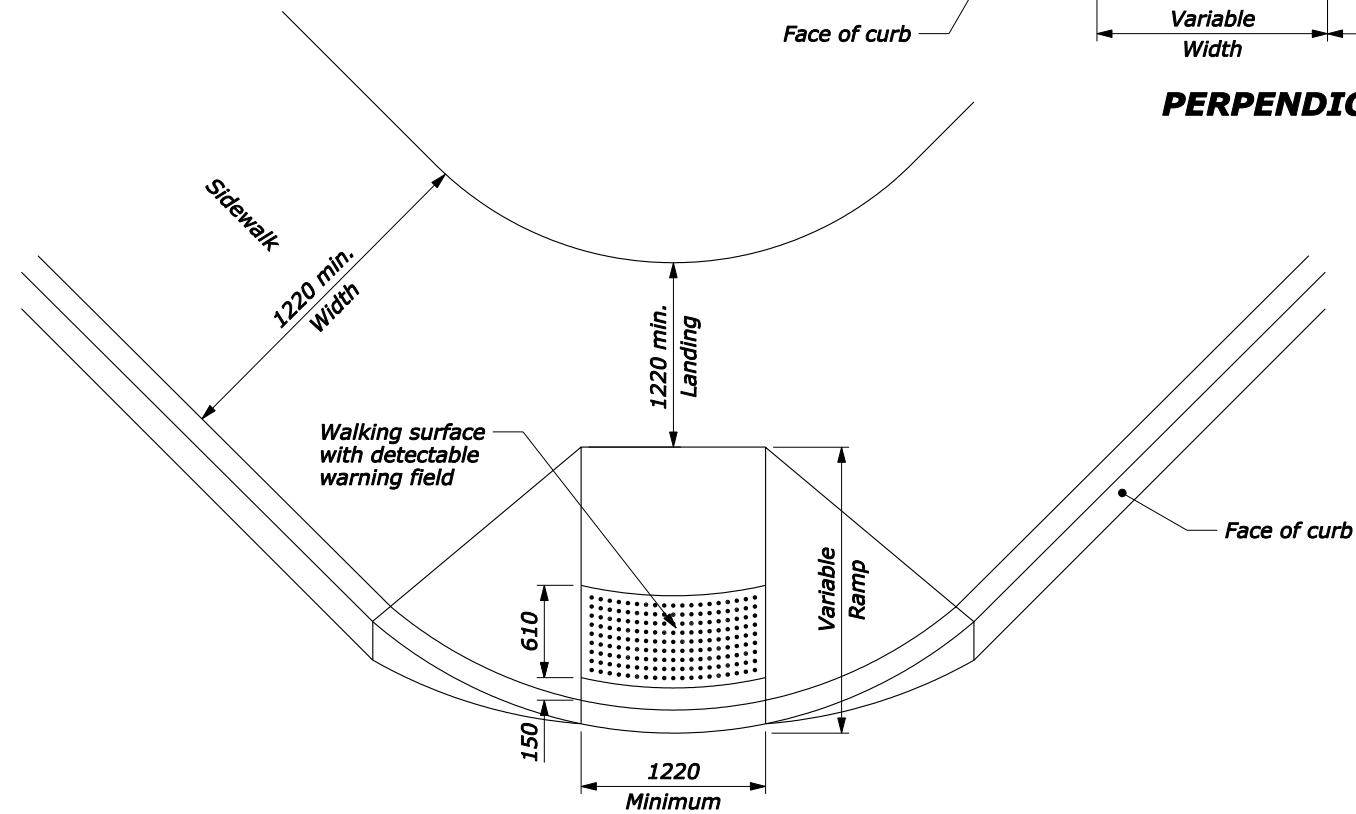

DIAGONAL CURB RAMP

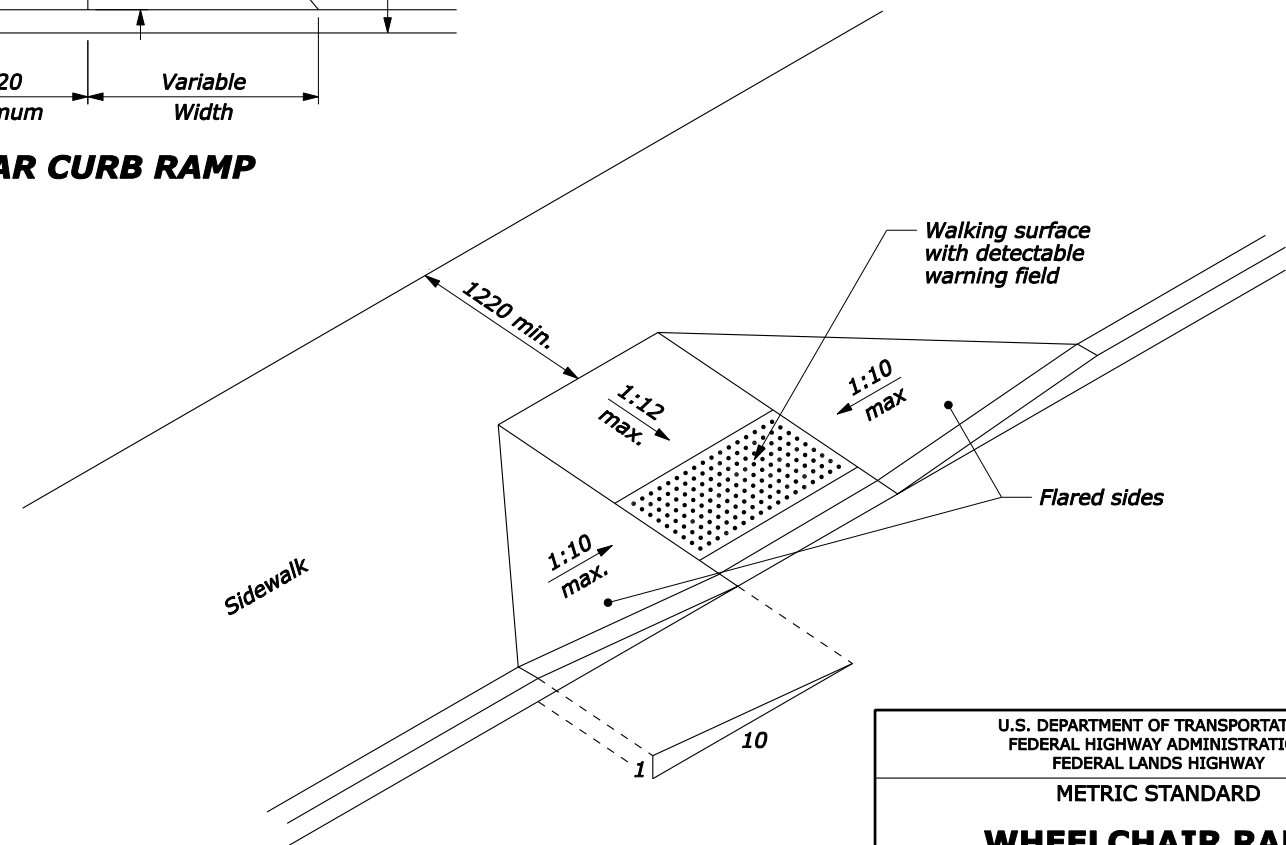

RAMP - ISOMETRIC

NOTE:

1. The maximum cross slopes of ramps must not exceed 2% in any direction.
2. Use a coarse broom finish running perpendicular to the slope to create a slip resistant surface on concrete ramp surfaces, exclusive of the detectable warning fields.
3. Construct curb ramp perpendicular to the curb. Avoid skewing the ramp face.
4. Construct ramp transitions between walks, gutters, or streets that are flush and free of abrupt vertical changes not to exceed 63 mm.
5. Locate drainage inlets and manholes outside of ramp walking surfaces or landings.
6. Dimensions without units are millimeters.

FOR COMMENT

NO SCALE